

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 308 252 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **24.03.93** (51) Int. Cl.⁵: **H04N 9/04**, **H04N 9/73**

(21) Application number: **88308608.4**

(22) Date of filing: **16.09.88**

(54) **Video signal processing circuit of a video camera.**

(30) Priority: **18.09.87 JP 235675/87**

(43) Date of publication of application:
22.03.89 Bulletin 89/12

(45) Publication of the grant of the patent:
24.03.93 Bulletin 93/12

(84) Designated Contracting States:
DE FR GB

(56) References cited:
DE-A- 3 619 708

PATENT ABSTRACTS OF JAPAN, vol. 11, no. 312 (E-548)[2759], 12th October 1987; & JP-A-62 104 290 (CANON INC.) 14-05-1987

PATENT ABSTRACTS OF JAPAN, vol. 8, no. 200 (E-266)[1637], 13th September 1984; & JP-A-59 89 090 (MATSUSHITA DENKI SANGYO K.K.)23-05-1984

PATENT ABSTRACTS OF JAPAN, vol. 8, no. 173 (E-259)[1610], 9th August 1984; & JP-A-59 67 790 (MATSUSHITA DENKI SANGYO K.K.) 17-04-1984

(73) Proprietor: **VICTOR COMPANY OF JAPAN, LIMITED**
12, 3-chome, Moriya-Cho Kanagawa-ku
Yokohama-Shi Kanagawa-Ken 221(JP)

(72) Inventor: **Aso, Michihiro**
No. 602-5-401, Toriyamacho Kohoku-Ku
Yokohama-Shi Kanagawa-Ken(JP)
Inventor: **Watanabe, Taro**
No. 55-9, Torigaoka Totsuka-Ku
Yokohama-Shi Kanagawa-Ken(JP)
Inventor: **Ueda, Kazuhiko**
No. 2-9-13-302, Jindaiji Kanagawa-Ku
Yokohama-Shi Kanagawa-Ken(JP)

(74) Representative: **Robinson, John Stuart et al**
Marks & Clerk Alpha Tower Suffolk Street
Queensway
Birmingham, B1 1TT (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 308 252 B1

Description

BACKGROUND OF THE INVENTION

5 The present invention generally relates to a video signal processing circuit of a video camera, and more particularly relates to a video signal processing circuit of a single chip colour camera which employs a solid state pickup device such as a charge coupled device (hereinafter referred to as a CCD).

10 An example of the conventional video signal processing circuit of the single chip colour camera as disclosed e.g. in DE-A-3 619 708 is described with reference to FIG.7. FIG.7 shows a system block diagram of a signal processing circuit 20 of the single chip colour camera which employs the CCD. Due to incident light from a camera lens (not shown) an electric charge is generated and accumulated in a CCD image sensor 12. The accumulated electric charge is read out from the CCD image sensor 12 responsive to a horizontal driving pulse ϕ_H and a vertical driving pulse ϕ_V . The read out accumulated charge is inputted to a sample and hold circuit 13 in a form of CCD output gate reset pulse ϕ_R of approximately 0.6 volts p-p being superposed with a video signal of approximately 0.1 volt p-p. The sample and hold circuit 13 transforms the CCD output gate reset pulse ϕ_R superimposed with the video signal into a continuous signal and supplies the continuous signal to an automatic gain control circuit (hereinafter referred to as an AGC circuit) 14. The AGC circuit 14 has a variable gain of 0 to 9 dB for example, and operates so that when an iris within the single chip colour camera is opened, the AGC circuit 14 adjusts the video signal input therein to a suitable level, and supplies the video signal subjected to the adjustment to low pass filters (hereinafter referred to as LPF) 15 and 16, and a band pass filter (hereinafter referred to as BPF) 17.

20 An explanation is now given of an operation of processing a luminance signal from the video signal. The LPF 15 has a cut-off frequency of approximately 3.2 MHz, and accordingly a luminance signal Y_H is obtained by the LPF 15. In addition, a horizontal resolution of up to approximately 270 lines can be determined by the LPF 15. At a following stage, an equalizer 24 compensates a time difference between the luminance signal Y_H and a colour signal which is separately processed from the video signal as described later and thus adds a time delay of approximately 0.4 μ sec to the luminance signal Y_H . Next, a clamping circuit 25 determines a set-up value of the luminance signal, and thereafter a gamma compensation circuit 26 determines a γ characteristic, that is a γ value, for determining an output characteristic of the luminance signal. The γ characteristic of the signal obtained from the CCD image sensor 12 is such that γ is approximately equal to 1. However, the gamma compensation circuit 26 is designed to perform a compensation so as to obtain a gamma value of 0.45, and therefore compensates the luminance signal Y_H output from the single chip colour camera to the gamma value of 0.45. Following the gamma compensation circuit 26, a trap circuit 31 removes a cross-talk component of a colour signal of 3.97 MHz from the luminance signal Y_H , and thereafter supplies the luminance signal Y_H to a delay circuit 32 and an operational circuit 33. A horizontal contour compensation signal for compensating a horizontal contour of the luminance signal Y_H is produced through the delay circuit 32 and a differential amplifier accommodated in the operational circuit 33. The operational circuit 33 adds the contour compensation signal to the luminance signal Y_H and thereafter outputs the luminance signal Y_H to an adder 37. Further, a vertical contour compensation signal is produced from a luminance signal Y_L which is obtained through the LPF 16 which has a cut-off frequency at approximately 0.8 MHz. The luminance signal Y_L is subjected to a similar process to that described above for the luminance signal Y_H with respect to a clamping circuit 34, a gamma compensation circuit 27, a delay circuit 35, and an operational circuit 36. Thus, the vertical contour compensation signal which is added to the luminance signal Y_L is outputted to the adder 37.

45 Next, a description is given of an operation of processing the colour signal in the conventional video signal processing circuit. The video signal is supplied from the AGC circuit 14 to the BPF 17 which has a band width of 3.97 ± 1 MHz and thereby extracts a signal from the video signal. This extracted signal is supplied to and detected by a synchronous detector (hereinafter referred to as a detector) 18 and as a result, a colour difference signal is obtained. The colour difference signal has values of 2R-G and 2B-G, where R denotes a red primary colour signal, B denotes a blue primary colour signal and G denotes a green primary colour signal. The colour difference signal alternates between the values 2R-G and 2B-G for every one scanning line and is a line sequential colour difference signal. The line sequential colour difference signal is subjected to a band limitation to 0.8 MHz in a LPF 19. Thereafter the luminance signal Y_L supplied from the LPF 16 is added to the line sequential colour difference signal in an adder 21. As a result, the green signal G is cancelled out from the line sequential colour difference signal having the values 2R-G and 2B-G, so that a line sequential colour signal having values of 2R and 2B is outputted from the adder 21. Next, white balance gain control amplifiers (hereinafter referred to as a white balance GCA) 22 and 23 determine a set-up value and a white balance of the primary colour signals R and B. Thereafter, the

primary colour signals R and B are subjected to a gamma compensation in respective gamma compensation circuits 28 and 29 and then are supplied to respective colour difference signal circuits (subtracting circuit) 38 and 39. The luminance signal Y_L from the gamma compensation circuit 27 is supplied to both of the colour difference signal circuits 38 and 39 so that line sequential colour difference signals $R-Y_L/B-Y_L$ are produced therefrom and supplied to a sequential-to-simultaneous conversion circuit 49. The sequential-to-simultaneous conversion circuit comprises a switching circuit 41, a delay circuit 44 which delays the sequential colour difference signal by one horizontal scanning interval, and switching circuits 42 and 43. The line sequential colour difference signals $R-Y_L/B-Y_L$ are supplied to the switching circuit 41 which switches for every one scanning line and thereby obtains a continuous line sequential colour difference signal. Thereafter, two line sequential colour difference signals $R-Y_L/B-Y_L$ are formed such that one of the line sequential colour difference signals $R-Y_L/B-Y_L$ is delayed by the delay circuit 44 by one horizontal scanning interval. Next, the switching circuits 42 and 43 perform switching operations so as to convert the two line sequential colour difference signals $R-Y_L/B-Y_L$ into two colour difference signals $R-Y_L$ and $B-Y_L$ which occur simultaneously for each horizontal scanning interval of 1H. The colour difference signals $R-Y_L$ and $B-Y_L$ from the sequential-to-simultaneous conversion circuit 49 are supplied to an encoder 45 where a balanced modulation is carried out on the respective colour subcarriers with the colour difference signals $R-Y_L$ and $B-Y_L$ respectively and the balanced modulated signals are mixed together. Thus, a chroma signal is outputted from the encoder 45. In the case of the NTSC system for example, the chroma signal has a frequency of 3.58 MHz.

However, the conventional CCD single chip colour camera does not have a construction so as to compensate by electrical means an error in luminance composition, and instead performs the compensation for the error in luminance composition by an optical construction. That is, the error in luminance composition is compensated by mounting a colour temperature conversion filter (an optical filter) for compensating for a change in colour temperature in front of the camera lens.

In general, the colour camera is adjusted by taking a reference object which is illuminated with a predetermined colour temperature of 3200 K for example. However, when taking an arbitrary picked object which is illuminated by light of a different colour temperature it is necessary to adjust the colour camera in order to obtain the predetermined colour temperature. There is a method of performing the adjustment optically by mounting a colour temperature conversion filter in front of the camera lens so as to convert the different colour temperature to 3200 K. This method for adjusting the colour temperature with respect to the conventional circuit by using the optical filter is beneficial in that the error in luminance is reduced. However, the use of the optical filter results in an increased weight of the colour camera and is a hindrance to manipulate a colour camera that should be compact and light in weight.

SUMMARY OF THE INVENTION

Accordingly, it is a general object of the present invention to provide a novel and useful video signal processing circuit of a single chip colour camera in which the disadvantages of the conventional video signal processing circuit of the colour camera have been eliminated.

A more specific object of the present invention is to provide a video signal processing circuit of a single chip colour camera having a luminance error detection circuit which contains colour temperature detection means and which determines a compensation signal for compensating an error in luminance by an output signal from the colour temperature detection means. The precharacterising part of claim 1 is based on DE-A-3 619 708.

The above objects and features of the present invention can be achieved by a video signal processing circuit of a single chip colour camera comprising a colour separation filter for performing a colour separation on incident light passing therethrough so as to output colour separated light, a solid state pickup device for outputting a video signal in response to the colour separated light passed through said colour separation filter and projected thereto, main circuit means for generating a first luminance signal, a second luminance signal, a first colour difference signal and a second colour difference signal from said video signal, compensating signal generating means for obtaining a compensation signal from said first and second colour difference signals, operational means for applying said compensation signal to said first luminance signal, and colour temperature detection means for detecting a colour temperature of the incident light and outputting a DC control voltage so as to determine said compensation signal.

Other objects, features and advantages of the present invention will become apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG.1 is a system block diagram of a main part of a video signal processing circuit of a single chip colour camera of the present invention;

FIG.2 is a system block diagram of a luminance error compensation circuit which constitutes the circuit of the present invention;

FIG.3 is a system block diagram of an image pickup system conforming to an NTSC system;

FIG.4 is a diagram for explaining the principle of operation of an example of a colour filter for a single chip colour camera to which the present invention is applied;

FIG.5 is a graph showing a non-linear input/output characteristic of a non-linear circuit within the luminance error compensation circuit of the present invention;

FIG.6 is a system block diagram of a second embodiment of the circuit of the present invention;

FIG.7 is a system block diagram of the conventional signal processing circuit of the single chip colour camera;

FIG.8 is a graph showing a conversion characteristic of a colour temperature detection circuit which detects a colour temperature and outputs a DC control voltage in accordance with the colour temperature; and

FIG.9 is a graph showing a control characteristic of a DC control circuit which is controlled by the DC control voltage output by the colour temperature detection circuit.

DETAILED DESCRIPTION

A description is now given of an embodiment of a video signal processing circuit of a single chip colour camera of the present invention with reference to FIG.1. FIG.1 is a system block diagram of a main part of the video processing circuit of the single chip colour camera of the present invention. The main part comprises a colour filter 11, a CCD image sensor 12, and a main circuit 30. In FIG.1, those parts which are the same as those parts in FIG.7 are given the same designations and a description thereof will be omitted.

First, a description is given of a single chip colour camera (hereinafter referred to as a colour camera) conforming to a complementary colour difference line sequential system. The camera conforming to this system uses only one CCD image sensor 12. The colour separation filter 11 is placed in front of the CCD image sensor 12 and performs colour separation on light passing therethrough. As shown in FIG.4, the colour separation filter 11 is constructed by colour elements of four colours which are Mg (magenta), G (green), Ye (yellow), and Cy (cyan). The CCD image sensor 12 has a photodiode (not shown) positioned behind each of the colour elements. Due to the light of one of the colours Mg, G, Ye, and Cy that is passed through the respective colour element, accumulated charges are generated in the photodiodes. Next the video signal processing circuit performs an interlacing operation whereby the accumulated charges are read out from the photodiodes for every one field of a picture frame. In detail, as shown in FIG.4, in a field A the video processing circuit reads an accumulation signal corresponding to the accumulated charges of two vertically adjacent picture elements in an n th line and after reading out the n th line, reads the $n+1$ th line. After reading out the field A in this manner, the video processing circuit reads a field B in a similar way to that for the field A. However the reading of lines in the field B is deviated from the respective lines read in the field A by one row of picture elements as shown in FIG.4. When the video signal processing circuit reads the picture elements in a horizontal direction in FIG.4 signals of a combination (Ye + Mg) and another combination (Cy + G) are produced alternately in the n th line, and signals of (Ye + G) and (Cy + Mg) are produced alternately in the $n+1$ th line.

In this manner video signal components S_n and S_{n+1} are outputted for each of the fields A and B from the gamma compensation circuits 26 and 27. The video signal component S_n is made up of a luminance signal component and a modulated colour difference signal and is expressed as follows:

$$S_n = Y_n + C_n \sin \omega t + \dots$$

where

Y_n denotes the luminance signal

C_n denotes a modulated signal component of the modulated colour difference signal, and

ω denotes the angular frequency by which the colour element pairs are read

The video signal component S_n is similarly expressed by:

$$S_{n+1} = Y_{n+1} + C_n \sin \omega t + \dots$$

Further, the luminance signal components Y_n and Y_{n+1} for each of the lines are expressed as follows:

$$\begin{aligned} Y_n &= (Y_e + Mg) + (Cy + G) \\ &= [(R+G) + (R+B)] + [(B+G) + G] \\ &= 2R + 3G + 2B \end{aligned} \quad (1)$$

$$\begin{aligned} Y_{n+1} &= (Y_e + G) + (Cy + Mg) \\ &= [(R+G) + G] + [(B+G) + (R+B)] \\ &= 2R + 3G + 2B \end{aligned} \quad (2)$$

Also, the modulated signal components C_n and C_{n+1} for each of the lines are expressed as follows:

$$\begin{aligned} C_n &= (Y_e + Mg) - (Cy + G) \\ &= 2R - G \end{aligned} \quad (3)$$

$$\begin{aligned} C_{n+1} &= (Cy + Mg) - (Y_e + G) \\ &= 2B - G \end{aligned} \quad (4)$$

Thus, it can be seen from equations (1) and (2) that the luminance signal components of the n th line and the $n+1$ th line are identical, and it is possible to obtain the luminance signals just by passing the luminance signal components through LPF filters 15 and 16

However, the proportion of the primary colour components in the luminance signal differ from that of the luminance signal conforming to the NTSC system. A luminance signal Y of the NTSC system is expressed as follows:

$$Y = 0.30R + 0.59G + 0.11B \quad (5)$$

Therefore there exists a luminance error between the luminance signal of the NTSC system and the luminance signal outputted from the respective gamma compensation circuits 26 and 27 in FIG.1. Further, the construction of the video processing circuit of the present invention is such that it is not possible to obtain unmixed primary colour signals by the use of the colour separation filter 11 having the colour picture element array as shown in FIG.4. Because of this, it is not possible to construct an ideal NTSC image pick-up system of the colour camera which as shown in FIG.3 produces the luminance signal Y from the primary colour signals (components) R , G and B by a matrix circuit 46. As a result it is necessary to carry out a compensation on the luminance signals described in equations (1) and (2) in order to obtain the luminance signal Y .

A further description is now given of a construction and operation of the video signal processing circuit of a colour camera of the present invention with reference to FIG.1 whereby the above problems are solved. A luminance signal Y_L from the LPF 16 is amplified to a suitable level by an amplifier 47 and thereafter is supplied to an adder 21. The adder 21 adds a colour difference signal supplied from a synchronous detector 18 with the luminance signal Y_L to thus produce primary colour signals R and B . The primary colour signals R and B are supplied to a colour difference signal circuit 39 through a white balance GCA circuit 48 and a gamma compensation circuit 28 respectively. The luminance signal Y_L from the LPF 16 is also supplied to the colour difference signal circuit 39 through the gamma compensation circuit 27. Thus, the colour difference signal circuit 39 subtracts the luminance signal Y_L from the primary colour signals R and B supplied thereto, and thereafter supplies the line sequential colour difference signals $R-Y_L/B-Y_L$ to a sequential-to-simultaneous conversion circuit 49. The sequential-to-simultaneous conversion circuit 49 converts the line sequential colour difference signals $R-Y_L/B-Y_L$ into the colour difference signals $R-Y_L$ and $B-Y_L$ which occur simultaneously for each horizontal scanning interval of 1H, and thus outputs the colour difference signals $R-Y_L$ and $B-Y_L$ from respective output terminals.

In the present embodiment, the white balance GCA circuit 48 in FIG.1 corresponds to a combination of the white balance GCA circuits 22 and 23 of the conventional circuit in FIG.7. Also, the sequential-to-

simultaneous conversion circuit 49 in FIG.1 corresponds to a combination of the switching circuits 41, 42, 43 and the delay circuit 44 in FIG.7.

As may be understood from FIG.1, the construction of the video processing circuit of the present invention is such that it is not possible to obtain unmixed primary colour signals by the use of the colour separation filter 11. Because of this, it is not possible to construct an ideal NTSC image pick-up system for the colour camera which as shown in FIG.3 passes the primary colour signals R and B through respective white balance GCA circuits 22 and 23 so as to balance the levels of the primary colour signals R and B with respect to the level of the primary colour signal G for a given colour image being picked up, and passes the primary colour signals R, G, and B through respective gamma compensation circuits 27, 28, and 29 and a Y matrix 46 so as to produce the luminance signal Y which is in conformance with the NTSC system. For this reason, in the present embodiment shown in FIG.1 it is necessary to carry out a compensation on luminance signals described in equations (1) and (2) in order to obtain the luminance signal Y described in equation (5). Further, for a complete colour image, appropriate amount of hue, saturation and luminance are required. If the luminance level is changed, then the brightness of colour processed by the circuit in FIG.1 is changed even if the hue and the saturation remain unchanged. For example, a light blue colour has a different brightness than a dark blue colour. Therefore, because the luminance signal produced by the circuit of the present embodiment is different from the luminance signal Y in conformance with the NTSC system, it is necessary to change the brightness of the colour being processed, back to the brightness of the original colour by performing a luminance compensation.

Next, a description is given of a luminance error compensation circuit 40 which constitutes an essential part of the present invention with reference to FIG.2. When comparing the luminance signal described in equation (1) with the luminance signal Y conforming to the NTSC system described in equation (5), the proportion of the primary colour signal R is lower and the proportion of the primary colour B is higher than the respective proportions in the luminance signal Y. Accordingly it is necessary to perform a luminance compensation in which the proportion of the primary colour signal R is increased and the proportion of the primary colour signal B is decreased so as to obtain the proportions of the primary colour signals R, G and B shown in equation (5). The luminance compensation is performed as follows. The colour difference signals $R-Y_L$ and $B-Y_L$ are supplied from the respective output terminals of the sequential-to-simultaneous conversion circuit 49 in FIG.1 to a subtractor 51 as shown in FIG.2. The subtractor 51 performs the following subtraction on the colour difference signals $R-Y_L$ and $B-Y_L$:

$$(R-Y_L) - (B-Y_L) = R-B \quad (6)$$

Thus, the subtractor 51 supplies a difference signal $R-B$ to a non-linear circuit 52. An output signal from the non-linear circuit 52 is supplied to an adder 59 as a compensation signal C through a known DC control circuit 56. The adder 59 adds the compensation signal C to a luminance signal Y_w which is supplied from the gamma compensation circuit 26 in FIG.1, and thus outputs a luminance signal Y_w' which is expressed as follows:

$$\begin{aligned} Y_w' &= 2R + 3G + 2B + \alpha(R-B) \\ &= (2+\alpha)R + 3G + (2-\alpha)B \end{aligned} \quad (7)$$

where a variable α is a compensation amount produced by the DC control circuit 56. The DC control circuit has a control characteristic as shown in FIG.9 such that its gain which is proportional to the variable α increases in proportion to an increase of a DC control voltage supplied to the DC control circuit 56 from a known colour temperature detection circuit 55. The colour temperature detection circuit 55 detects the colour temperature of the light from the object (not shown) to be picked up by the CCD image sensor 12 and produces the DC voltage based on the detected colour temperature. Thus the variable α is a compensation amount which is controlled by the DC control voltage from the colour temperature detection circuit 55 in accordance with a colour temperature conversion. As a result, a D.C. control voltage verses colour temperature characteristic as shown in FIG.8 is obtained regarding the colour temperature detection circuit 55. That is, as the colour temperature of the incident light detected by the colour temperature circuit 55 increases, a proportional increase occurs in the level of the D.C. control voltage supplied to the D.C. control circuit 56.

Further, with the image pick-up system of the present invention, generation of a false colour signal may occur when picking up an achromatic colour object. If this is the case, when an output signal $R-B$ from the

subtractor 51 is added to the luminance signal Y_w as it is, the false colour signal results in a false luminance signal and thus deteriorates the picture quality. Accordingly, in order to eliminate the false colour signal, the output signal R-B from the subtractor 51 is passed through the non-linear circuit 52. The non-linear circuit has an input/output characteristic as shown in FIG.5. In FIG.5, a portion of the output signal R-B which is within a range defined by a false colour signal eliminating region A is eliminated from the output signal. The false colour signal eliminating region A corresponds to a clip quantity set by the non-linear circuit 52. The non-linear circuit 52 sets the clip quantity in accordance with a DC voltage applied thereto to thus eliminate the false colour signal from the difference signal R-B. On the other hand, portions of the difference signal R-B which have a level less than the range defined by the false colour signal eliminating region A are passed through as indicated in the difference signal passing region B₁ so that a negative level of an output signal increases in proportion to a negative level of the input difference signal R-B. Also, portions of the difference signal R-B which have a level greater than this range are passed through as indicated in the difference signal passing region B₂ so that the level of the output signal increases in proportion to the level of the input difference signal R-B. Thus a signal which has not been eliminated by the set clip quantity is added to the luminance signal Y_w as the compensation signal C through the DC control circuit 56.

A description will now be given of a second embodiment of the video signal processing circuit of the colour camera of the present invention with reference to FIG.6. In FIG.6, those portions which have the same construction as those in FIG.2 are given the same designations and a description thereof is omitted. The circuit of the second embodiment has a characteristic such that it is possible to further increase the accuracy of the compensation. That is, in the present embodiment the construction of the detecting portion of a luminance error compensation circuit 50 is different from that of the luminance error compensating circuit 40 in FIG.2 in that it separately detects the signals R and B which are obtained by adding the signal Y_L from the gamma compensation circuit 27 of FIG.1 to each of the signals R- Y_L and B- Y_L in adders 60 and 61 respectively. Thereafter the primary colour signals R and B are separately compensated in respective non-linear circuits 52A and 52B. In this manner, the degree of freedom in the compensation is increased. Further, a microcomputer 62 subjects a detection signal from the colour temperature detection circuit 55 to an analog-to-digital conversion. In response to the A/D converted detection signal, the microcomputer 62 reads out a pair of appropriate compensation values from stored data in a ROM thereof, which are predetermined in correspondence with detected various colour temperatures, then performs a digital-to-analog conversion on the compensation values, and applies the compensation values to DC control circuits 56A and 56B respectively. Thus, the microcomputer 62 can compensate each of the colour signals in accordance with the colour temperature of the object. The DC control circuits 56A and 56B output respective compensation signals C₁ and C₂ to an operational circuit 63. The operational circuit 63 adds the compensation signal C₁ to and subtracts the compensation signal C₂ from the luminance signal Y_w supplied from the gamma compensation circuit 26 in FIG.1 and thus outputs a luminance signal Y_w' .

As a result, the video signal processing circuit of the colour camera of the present invention is advantageous in that it is possible to decrease the size and weight of the entire camera and to realize a high performance at a low cost for the reason that the circuit arrangement of the present invention can be easily made in an integrated circuit chip.

Claims

1. A video signal processing circuit of a single chip colour camera comprising:
 - a colour separation filter (11) for performing a colour separation on incident light passing therethrough so as to output colour separated light;
 - a solid state pickup device (12) for outputting a video signal in response to the colour separated light passed through said colour separation filter and projected thereto;
 - main circuit means (30) for generating a first luminance signal (Y_w), a second luminance signal (Y_L), a first colour difference signal (R- Y_L) and a second colour difference signal (B- Y_L) from said video signal;
 - said video signal processing circuit characterized in that there is further provided a luminance error compensation means (40, 50) for compensating a luminance error in said first luminance signal based on a colour temperature of the incident light detected thereby.
2. A video signal processing circuit as claimed in Claim 1 characterized in that said luminance error compensation means comprises false colour signal suppressing means (64) for suppressing a false colour signal included in said first and second colour difference signals, compensation signal generating means (65) for detecting the colour temperature of the incident light and generating in accordance

with the detected colour temperature a compensation signal (C) from a signal output from said false colour signal suppressing means, and adding means (59) for adding said compensation signal to said first luminance signal to produce an output luminance signal (Y_w').

- 5 3. A video signal processing circuit of a single chip colour camera as claimed in claim 2 characterized in that said false colour signal suppressing means comprises subtracting means (51) for subtracting said second colour difference signal from said first colour difference signal and outputting a difference signal (R-B), and a non-linear circuit (52) for clipping the false colour signal from the difference signal supplied thereto; and that said compensation signal generating means comprises a DC control circuit (56) for
10 applying a compensation value (α) to the signal input from said non-linear circuit and outputting the compensation signal to said adding means, and a colour temperature detection circuit (55) for detecting the colour temperature of the incident light and outputting a DC control voltage to said DC control circuit based on the detected colour temperature so as to determine said compensation value to the compensation signal.
- 15 4. A video signal generating circuit as claimed in Claim 1 characterized in that said luminance error compensation means comprises false colour signal suppressing means (66) for removing first and second false colour signals from said first and second colour difference signals, compensation signal generating means (67) for detecting the colour temperature of the incident light and generating
20 respective compensation signals (C_1 , C_2), in accordance with the detected colour temperature, from first and second signals outputted from said false colour signal suppressing means, and operational means (63) for adding said first compensation signal to and subtracting said second compensation signal from said first luminance signal to produce an output luminance signal (Y_w').
- 25 5. A video signal processing circuit as claimed in Claim 4 characterized in that said false colour signal suppressing means comprises first and second adding means (60, 61) for adding said second luminance signal (Y_L) to said first and second colour difference signals (R- Y_L , B- Y_L) respectively and producing first and second primary colour signals (R, B) respectively, and first and second non-linear circuits (52A, 52B) for removing said first and second false colour signals from said first and second
30 primary colour signals; and that said compensation signal generating means comprises first and second DC control circuits (56A, 56B) for applying first and second compensation values to the first and second colour difference signals from which said first and second false colour signals are removed and which are inputted from said first and second non-linear circuits and outputting said compensation signals (C_1 , C_2) respectively to said operational means (63), and colour temperature detection means
35 (68) for detecting the colour temperature of the incident light and outputting first and second DC control voltages to said first and second DC control circuits based on the detected colour temperature so as to determine said first and second compensation values to said first and second compensation signals.
- 40 6. A video signal processing circuit as claimed in Claim 5 characterized in that said colour temperature detection means (68) comprises a colour temperature detection circuit (55) for detecting the colour temperature of the incident light, and a microcomputer (62) which is supplied with a colour temperature detection signal from said colour temperature detection circuit and outputs the first and second DC control voltages to said first and second DC control circuits in order to determine said first and second compensation values.
- 45 7. A video signal processing circuit as claimed in claim 1 characterized in that said main circuit means comprises a luminance signal processing portion and a colour signal processing portion; said luminance signal processing portion made up of a first low pass filter (15) for producing said first luminance signal, a first gamma compensation circuit (26) for performing a gamma compensation on
50 said first luminance signal outputted from said first low pass filter and outputting said first luminance signal, a second low pass filter (16) for producing said second luminance signal from said video signal, a second gamma compensation circuit (27) for performing a gamma compensation on said second luminance signal outputted from said second low pass filter, and an amplifier (47) for amplifying said second luminance signal supplied from said second low pass filter; and said colour signal processing
55 portion made up of a band pass filter (17) which extracts a signal from said video signal, a synchronous detector (18) which is supplied with the signal from said band pass filter and outputs a colour difference signal, an adder (21) for adding said second luminance signal from said amplifier to said colour difference signal and outputting first and second primary colour signals (R, B), a white balance gain

- control circuit (48) for determining a white balance and a set-up value of said first and second primary colour signals, a third gamma compensation circuit (28) for performing a gamma compensation on said first and second primary colour signals from said white balance gain control circuit, a subtractor (39) for subtracting said second luminance signal supplied from said second gamma compensation circuit from said first and second primary colour signals and outputting first and second line sequential colour difference signals $(R-Y_L/B-Y_L)$, and a sequential-to-simultaneous conversion circuit for converting said first and second line sequential colour difference signals into first and second colour difference signals $(R-Y_L, B-Y_L)$.
8. A video signal processing circuit as claimed in Claim 3 characterized in that said non-linear circuit removes a portion of the difference signal that is less than a predetermined magnitude, and passes remainders of the difference signal which are greater than the predetermined magnitude, and that said control temperature detection circuit outputs the DC control voltage with a level proportional to the detected colour temperature of the incident light, and that said DC control circuit has a gain which is proportional to the DC control voltage; said compensation value being proportional to said gain.
9. A video signal processing circuit as claimed in Claim 5 characterized in that said first and second non-linear circuits remove respective portions of the first and second primary colour signals that are less than a predetermined magnitude, and pass respective remainders of the first and second primary colour signals that are greater than the predetermined magnitude.
10. A video signal processing circuit as claimed in any of Claims 5 and 6 characterized in that said colour temperature detection circuit outputs the colour temperature detection signal at a level proportional to the detected colour temperature of the incident light, and that said first and second DC control circuits respectively have first and second gains which are proportional respectively to the first and second DC control voltages; said first and second compensation values being proportional respectively to said first and second gains.

Patentansprüche

1. Videosignalverarbeitungsschaltung für eine Einzelchipfarbkamera, aufweisend:
 ein Farbtrennfilter (11) zum Durchführen einer Farbtrennung bezüglich des einfallenden Lichts, das hier durchtritt, um so farbtrenntes Licht auszugeben;
 eine Festkörperbildaufnahmeverrichtung (12) zum Ausgeben eines Videosignals ansprechend auf das farbtrennte Licht, das durch das Farbtrennfilter geleitet worden ist und auf sie projiziert worden ist;
 eine Hauptschaltungseinrichtung (30) zum Erzeugen eines ersten Leuchtdichtesignals (Y_w), eines zweiten Leuchtdichtesignals (Y_L), eines ersten Farbdifferenzsignals $(R-Y_L)$ und eines zweiten Farbdifferenzsignals $(B-Y_L)$ aus diesem Videosignal;
 wobei die Videosignalverarbeitungsschaltung dadurch gekennzeichnet ist, daß ferner eine Leuchtdichtefehlerkompensationseinrichtung (40, 50) vorgesehen ist, die einen Leuchtdichtefehler im ersten Leuchtdichtesignal auf der Grundlage einer Farbtemperatur des einfallenden Lichts, die hierdurch detektiert wird, kompensiert.
2. Videosignalverarbeitungsschaltung nach Anspruch 1, **dadurch gekennzeichnet**, daß die Leuchtdichtefehlerkompensationseinrichtung eine Unterdrückungseinrichtung (64) für ein nicht echtes Farbsignal, die ein nicht echtes Farbsignal, das im ersten und zweiten Farbdifferenzsignal enthalten ist, unterdrückt, eine Kompensationssignalerzeugungseinrichtung (65), die die Farbtemperatur des einfallenden Lichts erfaßt und in Übereinstimmung mit der erfaßten Farbtemperatur ein Kompensationssignal (C) aus einem Signal erzeugt, das von der Unterdrückungseinrichtung für ein nicht echtes Farbsignal ausgegeben wird, und eine Addiereinrichtung (59) aufweist, die das Kompensationssignal zum ersten Leuchtdichtesignal zur Erzeugung eines Ausgangsleuchtdichtesignals (Y_w') addiert.
3. Videosignalverarbeitungsschaltung für eine Einzelchipfarbkamera nach Anspruch 2, **dadurch gekennzeichnet**, daß die Unterdrückungseinrichtung für ein nicht echtes Farbsignal eine Subtrahiereinrichtung (51) zum Subtrahieren des zweiten Farbdifferenzsignals vom ersten Farbdifferenzsignal und zur Ausgabe eines

Differenzsignals (R-B) und eine nicht lineare Schaltung (52) zum Clippen des nicht echten Farbsignals vom ihr zugeführten Differenzsignal aufweist; und daß die Kompensationssignalerzeugungseinrichtung eine DC-Steuerschaltung (56), die einen Kompensationswert (α) auf das Signal anwendet, das von der nicht linearen Schaltung eingegeben wird, und das Kompensationssignal zur Addiereinrichtung ausgibt, und eine Farbtemperaturerfassungsschaltung (55) aufweist, die die Farbtemperatur des einfallenden Lichts erfaßt und eine DC-Steuerspannung zur DC-Steuerschaltung auf der Grundlage der erfaßten Farbtemperatur ausgibt, um so den Kompensationswert des Kompensationssignals zu bestimmen.

4. Videosignalverarbeitungsschaltung nach Anspruch 1,

dadurch gekennzeichnet,

daß die Leuchtdichtefehlerkompensationseinrichtung eine Unterdrückungseinrichtung (66) für ein nicht echtes Farbsignal umfaßt, die erste und zweite nicht echte Farbsignale aus den ersten und zweiten Farbdifferenzsignalen entfernt, ferner eine Kompensationssignalerzeugungseinrichtung (67) zum Erfassen der Farbtemperatur des einfallenden Lichts und zum Erzeugen entsprechender Kompensationssignale (C_1 , C_2) in Übereinstimmung mit der erfaßten Farbtemperatur aus ersten und zweiten Signalen, die von der Unterdrückungseinrichtung für ein nicht echtes Farbsignal ausgegeben werden, und eine Funktionseinrichtung (63) aufweist, die das erste Kompensationssignal zum ersten Leuchtdichtesignal hinzuaddiert und das zweite Kompensationssignal von diesem Leuchtdichtesignal subtrahiert, um ein Ausgangsleuchtdichtesignal (Y_w) zu erzeugen.

5. Videosignalverarbeitungsschaltung nach Anspruch 4,

dadurch gekennzeichnet,

daß die Unterdrückungseinrichtung für ein nicht echtes Farbsignal erste und zweite Addiereinrichtungen (60, 61) zum Addieren des zweiten Leuchtdichtesignals (Y_L) jeweils zum ersten und zweiten Farbdifferenzsignal ($R-Y_L$, $B-Y_L$) und zum jeweiligen Erzeugen erster und zweiter Primärfarbsignale (R, B) und eine erste und zweite nichtlineare Schaltung (52A, 52B) aufweist, die das erste und zweite nicht echte Farbsignal aus dem ersten und zweiten Primärfarbsignal entfernen; und daß die Kompensationssignalerzeugungseinrichtung erste und zweite DC-Steuerschaltungen (56A, 56B) zum Anwenden erster und zweiter Kompensationswerte auf das erste und zweite Farbdifferenzsignal, von denen das erste bzw. zweite nicht echte Farbsignal entfernt worden sind und die von der ersten und zweiten nicht linearen Schaltung eingegeben worden sind, und zum jeweiligen Ausgeben der Kompensationssignale (C_1 , C_2) zur Funktionseinrichtung (63) und eine Farbtemperaturerfassungseinrichtung (68) aufweist, die die Farbtemperatur des einfallenden Lichts erfaßt und erste und zweite DC-Steuerspannungen zu den ersten und zweiten DC-Steuerschaltungen auf der Grundlage der erfaßten Farbtemperatur ausgibt, um so die ersten und zweiten Kompensationswerte für die ersten und zweiten Kompensationssignale zu bestimmen.

6. Videosignalverarbeitungsschaltung nach Anspruch 5,

dadurch gekennzeichnet,

daß die Farbtemperaturerfassungseinrichtung (68) eine Farbtemperaturerfassungsschaltung (55) zum Erfassen der Farbtemperatur des einfallenden Lichts und einen Mikrocomputer (62) umfaßt, dem ein Farbtemperaturerfassungssignal von der Farbtemperaturerfassungsschaltung zugeführt wird und der die ersten und zweiten DC-Steuerspannungen zu den ersten und zweiten DC-Steuerschaltungen ausgibt, um die ersten und zweiten Kompensationswerte zu bestimmen.

7. Videosignalverarbeitungsschaltung nach Anspruch 1,

dadurch gekennzeichnet,

daß die Hauptschaltungseinrichtung einen Leuchtdichtesignalverarbeitungsabschnitt und einen Farbsignalverarbeitungsabschnitt aufweist; daß der Leuchtdichtesignalverarbeitungsabschnitt aus einem ersten Tiefpaßfilter (15) zur Erzeugung des ersten Leuchtdichtesignals, einer ersten Gammakompensationsschaltung (26) zum Durchführen einer Gammakompensation bezüglich des ersten Leuchtdichtesignals, das vom ersten Tiefpaßfilter ausgegeben wird, und zur Ausgabe des ersten Leuchtdichtesignals, einem zweiten Tiefpaßfilter (16) zur Erzeugung des zweiten Leuchtdichtesignals aus dem Videosignal, einer zweiten Gammakompensationsschaltung (27) zum Durchführen einer Gammakompensation bezüglich des zweiten Leuchtdichtesignals, das vom zweiten Tiefpaßfilter ausgegeben wird, und einem Verstärker (47) besteht, der das zweite, vom zweiten Tiefpaßfilter zugeführte Leuchtdichtesignal verstärkt; und daß der Farbsignalverarbeitungsabschnitt aus einem Bandpaßfilter (17), das ein Signal aus dem Videosignal extrahiert, einem Synchrondetektor (18), dem das Signal vom Bandpaßfilter zugeführt wird und der ein

Farbdifferenzsignal ausgibt, einem Addierer (21) zum Addieren des zweiten Leuchtdichtesignals vom Verstärker zum Farbdifferenzsignal und zur Ausgabe erster und zweiter Primärfarbsignale (R, B), einer Weißabgleichverstärkungssteuerschaltung (48) zum Bestimmen eines Weißabgleichs und eines Einstellwerts für das erste und zweite Primärfarbsignal, einer dritten Gammakompensationsschaltung (28) zum Durchführen einer Gammakompensation bezüglich des ersten und zweiten Primärfarbsignals von der Weißabgleichverstärkungssteuerschaltung, einem Subtrahierer (39) zum Subtrahieren des zweiten Leuchtdichtesignals, das von der zweiten Gammakompensationsschaltung zugeführt wird, vom ersten und zweiten Primärfarbsignal und zur Ausgabe erster und zweiter zeilensequentieller Farbdifferenzsignale ($R-Y_L/B-Y_L$) und einer Sequentiell-auf-Simultanumsetzungsschaltung besteht, die das erste und zweite zeilensequentielle Farbdifferenzsignal in ein erstes und zweites Farbdifferenzsignal ($R-Y_L$, $B-Y_L$) umsetzt.

8. Videosignalverarbeitungsschaltung nach Anspruch 3, **dadurch gekennzeichnet**,
daß die nichtlineare Schaltung einen Bereich des Differenzsignals entfernt, der geringer als eine vorbestimmte Größe ist, und verbleibende Anteile des Differenzsignals, die größer als die vorbestimmte Größe sind, überträgt, und daß die Farbtemperaturerfassungsschaltung die DC-Steuerspannung mit einem Pegel proportional zur erfaßten Farbtemperatur des einfallenden Lichts ausgibt, und daß die DC-Steuerschaltung eine Verstärkung aufweist, die proportional zur DC-Steuerspannung ist; wobei der Kompensationswert proportional zur Verstärkung ist.

9. Videosignalverarbeitungsschaltung nach Anspruch 5, **dadurch gekennzeichnet**,
daß die erste und zweite nichtlineare Schaltung jeweils Bereiche des ersten und zweiten Primärfarbsignals entfernen, wobei diese Bereiche geringer als eine vorbestimmte Größe sind, und die jeweils verbleibenden Anteile des ersten und zweiten Primärfarbsignals, die größer als diese vorbestimmte Größe sind, übertragen.

10. Videosignalverarbeitungsschaltung nach einem der Ansprüche 5 und 6, **dadurch gekennzeichnet**,
daß die Farbtemperaturerfassungsschaltung das Farbtemperaturerfassungssignal auf einem Pegel proportional zur erfaßten Farbtemperatur des einfallenden Lichts ausgibt und daß die erste und zweite DC-Steuerschaltung jeweils eine erste bzw. zweite Verstärkung aufweisen, die proportional jeweils zur ersten bzw. zweiten DC-Steuerspannung sind; daß der erste und zweite Kompensationswert jeweils proportional zur ersten bzw. zweiten Verstärkung sind.

Revendications

1. Circuit de traitement de signal vidéo d'une caméra couleur monopuce, comprenant :
 - un filtre de séparation de couleurs (11) pour effectuer une séparation de couleurs sur une lumière incidente traversant celui-ci de manière à fournir une lumière à couleurs séparées;
 - un dispositif capteur à solide (12) pour fournir un signal vidéo en réponse à la lumière à couleurs séparées passée par ledit filtre de séparation de couleurs et projetée sur celui-ci;
 - des moyens principaux formant circuit (30) pour engendrer un premier signal de luminance (Y_W), un deuxième signal de luminance (Y_L), un premier signal de différence de couleur ($R-Y_L$) et un deuxième signal de différence de couleur ($B-Y_L$) à partir dudit signal vidéo,

ledit circuit de traitement de signal vidéo étant caractérisé en ce qu'il est en outre muni de moyens de compensation d'erreur de luminance (40, 50) pour compenser une erreur de luminance dans ledit premier signal de luminance sur la base d'une température de couleur de la lumière incidente détectée par celui-ci.
2. Circuit de traitement de signal vidéo selon la revendication 1, caractérisé en ce que lesdits moyens de compensation d'erreur de luminance comprennent des moyens de suppression de signal de couleur fausse (64) pour supprimer un signal de couleur fausse inclus dans lesdits premier et deuxième signaux de différence de couleur, des moyens générateurs de signal de compensation (65) pour détecter la température de couleur de la lumière incidente et engendrer selon la température de couleur détectée un signal de compensation (C) à une sortie de signal desdits moyens de suppression de signal de couleur fausse, et des moyens d'addition (59) pour ajouter ledit signal de compensation

audit premier signal de luminance pour produire un signal de luminance de sortie (Y_w').

3. Circuit de traitement de signal vidéo d'une caméra couleur monopuce selon la revendication 2, caractérisé en ce que lesdits moyens de suppression de signal de couleur fausse comprennent des
5 moyens de soustraction (51) pour soustraire ledit deuxième signal de différence de couleur dudit premier signal de différence de couleur et fournir un signal différence (R-B), et un circuit non linéaire (52) pour écrêter le signal de couleur fausse dans le signal différence appliqué à celui-ci; et en ce que lesdits moyens générateurs de signal de compensation comprennent un circuit de commande à courant continu (56) pour appliquer une valeur de compensation (α) au signal d'entrée issu dudit circuit
10 non linéaire et fournir le signal de compensation auxdits moyens d'addition, et un circuit détecteur de température de couleur (55) pour détecter la température de couleur de la lumière incidente et fournir une tension continue de commande au dit circuit de commande à courant continu sur la base de la température de couleur détectée, de manière à déterminer ladite valeur de compensation du signal de compensation.
15
4. Circuit de traitement de signal vidéo selon la revendication 1, caractérisé en ce que lesdits moyens de compensation d'erreur de luminance comprennent des moyens de suppression de signaux de couleurs fausses (66) pour éliminer des premier et deuxième signaux de couleurs fausses dans lesdits premier
20 et deuxième signaux de différence de couleur, des moyens générateurs de signaux de compensation (67) pour détecter la température de couleur de la lumière incidente et produire des signaux de compensation respectifs (C_1 , C_2) selon la température de couleur détectée, à partir des premier et deuxième signaux fournis par lesdits moyens de suppression de signaux de couleurs fausses, et des moyens d'opération (63) pour ajouter ledit premier signal de compensation audit premier signal de luminance et soustraire ledit deuxième signal de compensation dudit premier signal de luminance pour
25 produire un signal de luminance de sortie (Y_w').
5. Circuit de traitement de signal vidéo selon la revendication 4, caractérisé en ce que lesdits moyens de suppression de signaux de couleur fausse comprennent des premiers et deuxièmes moyens d'addition (60, 61) pour ajouter ledit deuxième signal de luminance (Y_L) auxdits premier et deuxième signaux de
30 différence de couleur (R- Y_L , B- Y_L), respectivement, et produire des premier et deuxième signaux de couleurs primaires (R, B), respectivement, et des premier et deuxième circuits non linéaires (52A, 52B) pour éliminer lesdits premier et deuxième signaux de couleurs fausses dans lesdits premier et deuxième signaux de couleurs primaires; et en ce que lesdits moyens générateurs de signaux de compensation comprennent des premier et deuxième circuits de commande à courant continu (56A, 56B) pour appliquer des première et deuxième valeurs de compensation aux premier et deuxième
35 signaux de différence de couleur dans lesquels lesdits premier et deuxième signaux de couleurs fausses sont éliminés et qui sont appliquées à partir desdits premier et deuxième circuits non linéaires et fournir lesdits signaux de compensation (C_1 , C_2), respectivement, auxdits moyens d'opération (63), et des moyens de détection de température de couleur (68) pour détecter la température de couleur de la lumière incidente et fournir des première et deuxième tensions continues de commande auxdits
40 premier et deuxième circuits de commande à courant continu sur la base de la température de couleur détectée, de manière à déterminer lesdites première et deuxième valeurs de compensation desdits premier et deuxième signaux de compensation.
- 45 6. Circuit de traitement de signal vidéo selon la revendication 5, caractérisé en ce que lesdits moyens de détection de température de couleur (68) comprennent un circuit de détection de température de couleur (55) pour détecter la température de couleur de la lumière incidente, et un microordinateur (62) qui reçoit un signal de détection de température de couleur issu dudit circuit de détection de température de couleur et fournit les première et deuxième tensions continues de commande auxdits
50 premier et deuxième circuits de commande à courant continu pour déterminer lesdites première et deuxième valeurs de compensation.
7. Circuit de traitement de signal vidéo selon la revendication 1, caractérisé en ce que lesdits principaux
55 moyens formant circuit comprennent une partie de traitement de signal de luminance et une partie de traitement de signal de couleur, ladite partie de traitement de signal de luminance étant composée d'un filtre passe-bas (15) pour produire ledit premier signal de luminance, un premier circuit de compensation de gamma (26) pour effectuer une compensation de gamma sur ledit premier signal de luminance fourni par ledit premier filtre passe-bas et fournir ledit premier signal de luminance, et un deuxième

- 5 filtre passe-bas (16) pour produire ledit deuxième signal de luminance à partir dudit signal vidéo, un deuxième circuit de compensation de gamma (27) pour effectuer une compensation de gamma sur ledit deuxième signal de luminance fourni par ledit deuxième filtre passe-bas, et un amplificateur (47) pour amplifier ledit deuxième signal de luminance fourni par ledit deuxième filtre passe-bas; et ladite
- 10 partie de traitement de signal de chrominance étant composée d'un filtre passe-bande (17) qui extrait un signal dudit signal vidéo, un détecteur synchrone (18) qui reçoit le signal issu dudit filtre passe-bande et fournit un signal de différence de couleur, un additionneur (21) pour additionner ledit deuxième signal de luminance issu dudit amplificateur avec ledit signal de différence de couleur et fournir des premier et deuxième signaux de couleurs primaires (R, B), un circuit de commande de gain d'équilibre des blancs (48) pour déterminer un équilibre des blancs et une valeur de marge de noir
- 15 desdits premier et deuxième signaux de couleurs primaires, un troisième circuit de compensation de gamma (28) pour effectuer une compensation de gamma sur lesdits premier et deuxième signaux de couleurs primaires issus dudit circuit de commande de gain d'équilibre des blancs, un soustracteur (39) pour soustraire ledit deuxième signal de luminance issu dudit deuxième circuit de compensation de gamma desdits premier et deuxième signaux de couleurs primaires et fournir lesdits premier et deuxième signaux de différence de couleur à séquence de lignes ($R-Y_L$, $B-Y_L$), et un circuit de conversion séquentiel/simultané pour convertir lesdits premier et deuxième signaux de différence de couleur à séquence de lignes en des premier et deuxième signaux de différence de couleur ($R-Y_L$, $B-Y_L$).
- 20
8. Circuit de traitement de signal vidéo selon la revendication 3, caractérisé en ce que ledit circuit non linéaire élimine une partie du signal différence qui est inférieure à une amplitude prédéterminée, et laisse passer le reste du signal de différence qui est supérieur à l'amplitude prédéterminée, en ce que ledit circuit de détection de température de couleur fournit la tension continue de commande avec un
- 25 niveau proportionnel à la température de couleur détectée de la lumière incidente, et en ce que le circuit de commande à courant continu a un gain qui est proportionnel à la tension continue de commande, la dite valeur de compensation étant proportionnelle audit gain.
- 30
9. Circuit de traitement de signal vidéo selon la revendication 5, caractérisé en ce que lesdits premier et deuxième circuits non linéaires éliminent des parties respectives des premier et deuxième signaux de couleurs primaires qui sont inférieures à une amplitude prédéterminée, et laissent passer les restes respectifs des premier et deuxième signaux de couleurs primaires qui sont supérieurs à l'amplitude prédéterminée.
- 35
10. Circuit de traitement de signal vidéo selon l'une des revendications 5 et 6, caractérisé en ce que ledit circuit de détection de température de couleur fournit le signal de détection de température de couleur à un niveau proportionnel à la température de couleur de la lumière incidente, et en ce que lesdits premier et deuxième circuits de commande à courant continu ont respectivement des premier et deuxième gains qui sont respectivement proportionnels aux première et deuxième tensions continues de commande, lesdites première et deuxième valeurs de compensation étant respectivement proportionnelles auxdits premier et deuxième gains.
- 40
- 45
- 50
- 55

FIG. 1

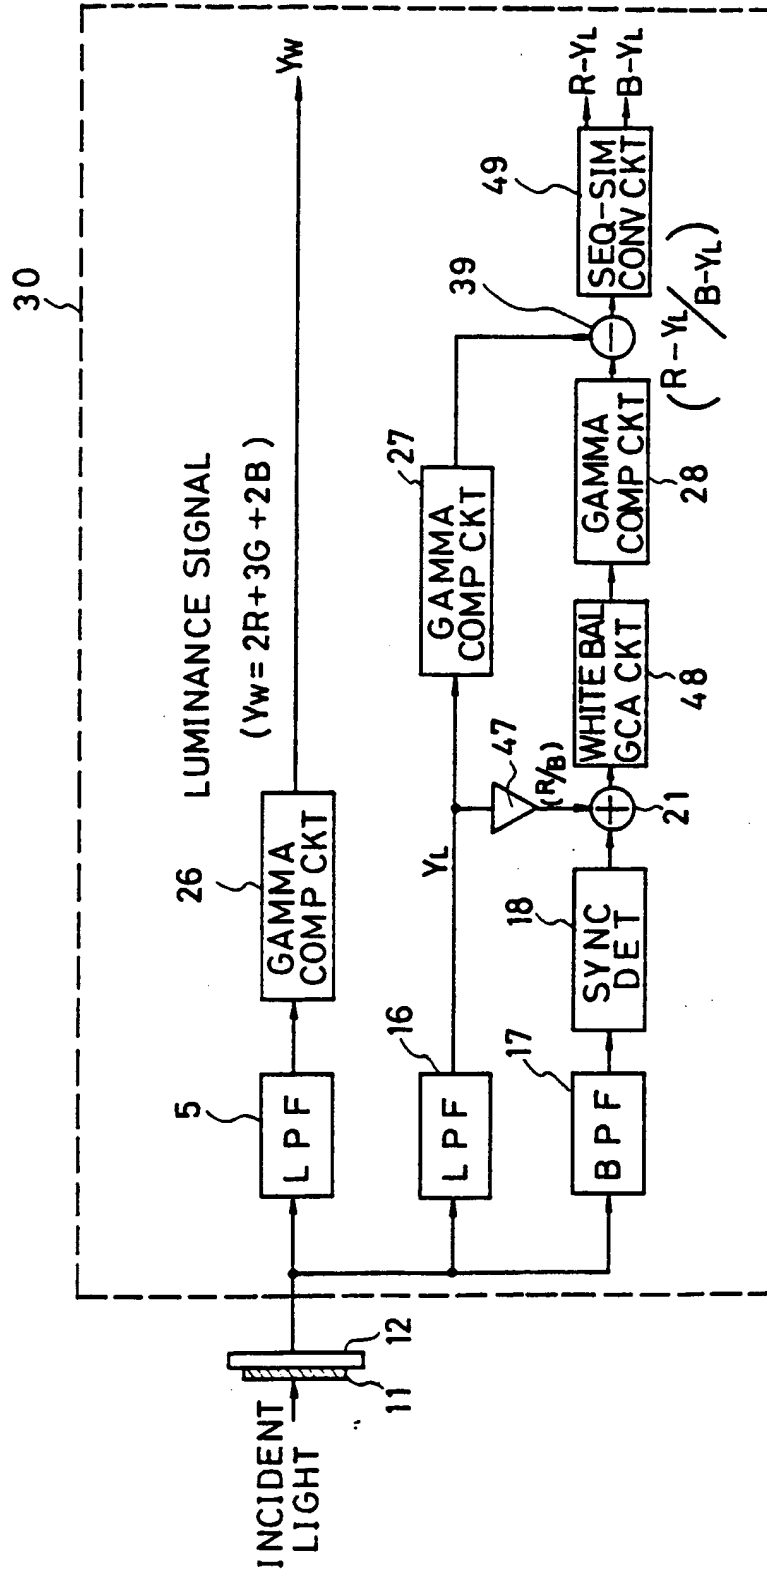


FIG. 2

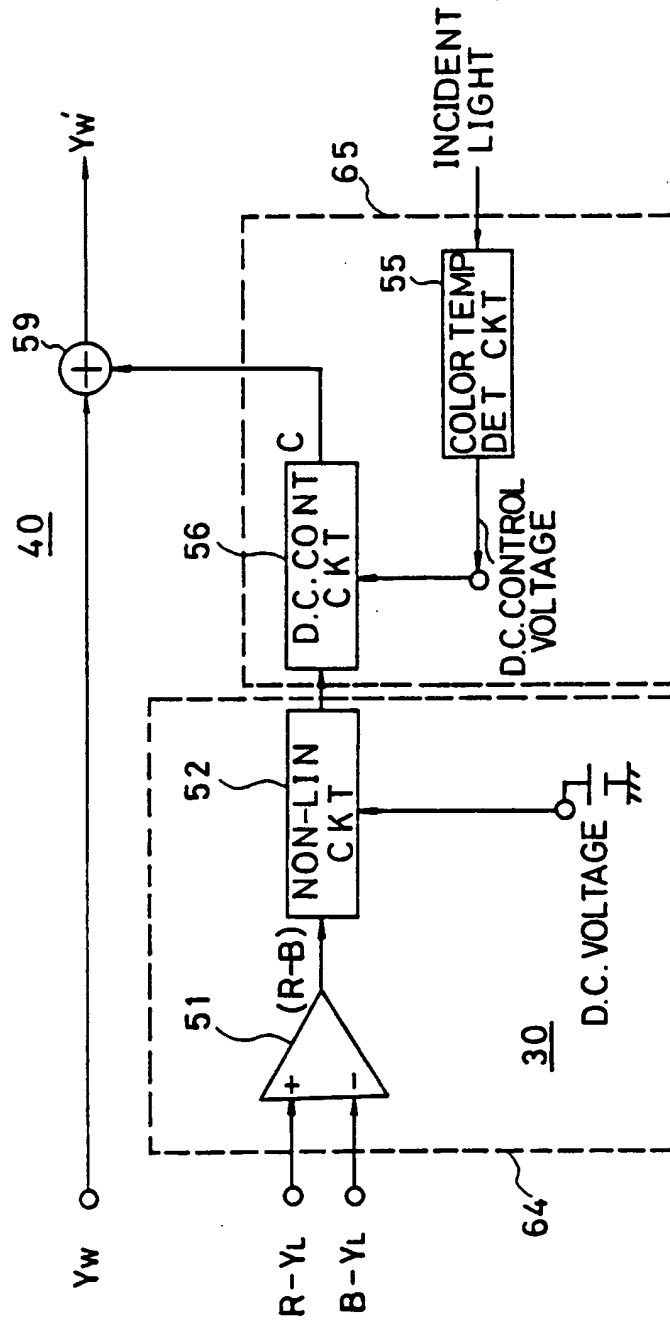


FIG. 3

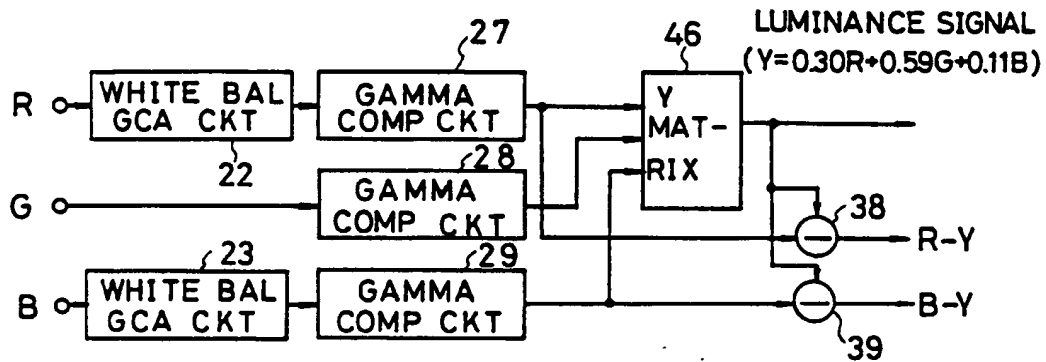


FIG. 4

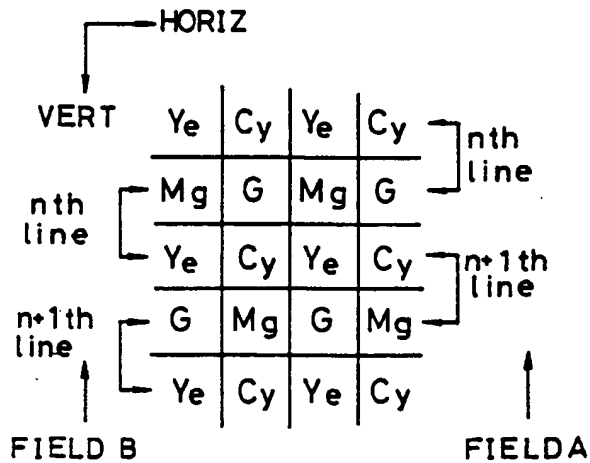


FIG. 5

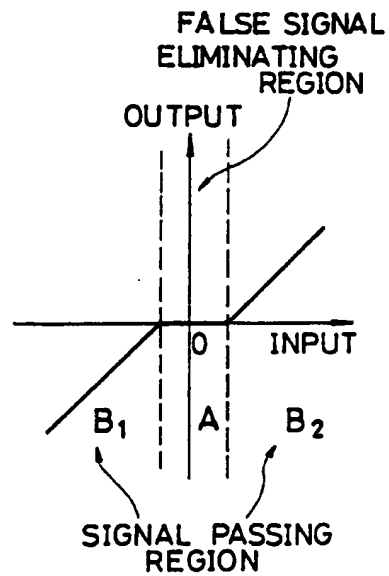
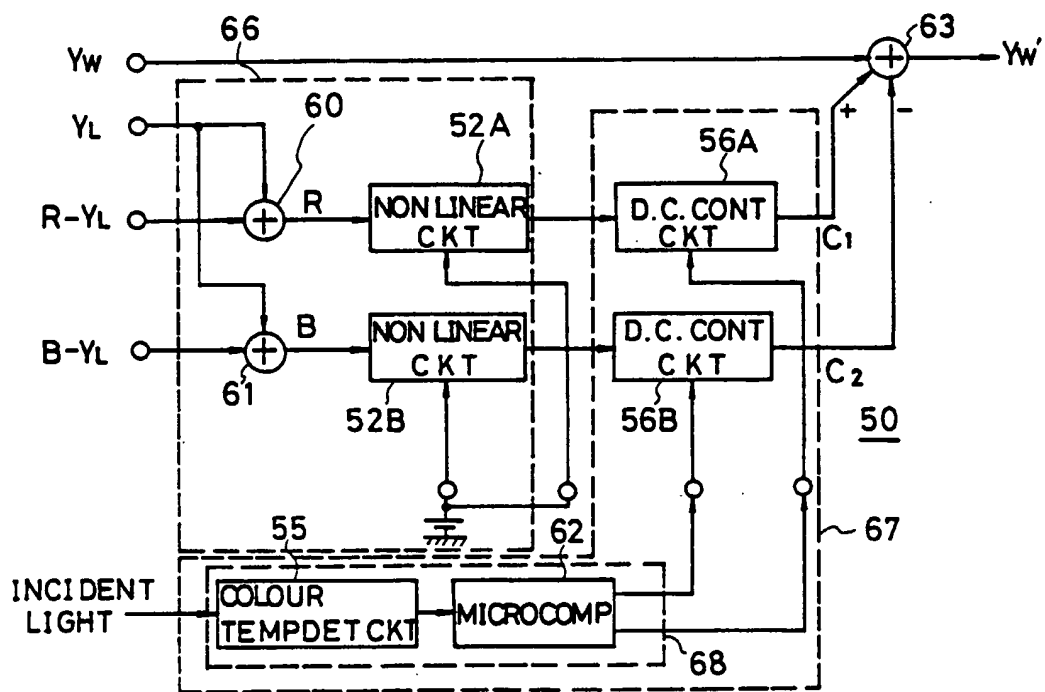


FIG. 6



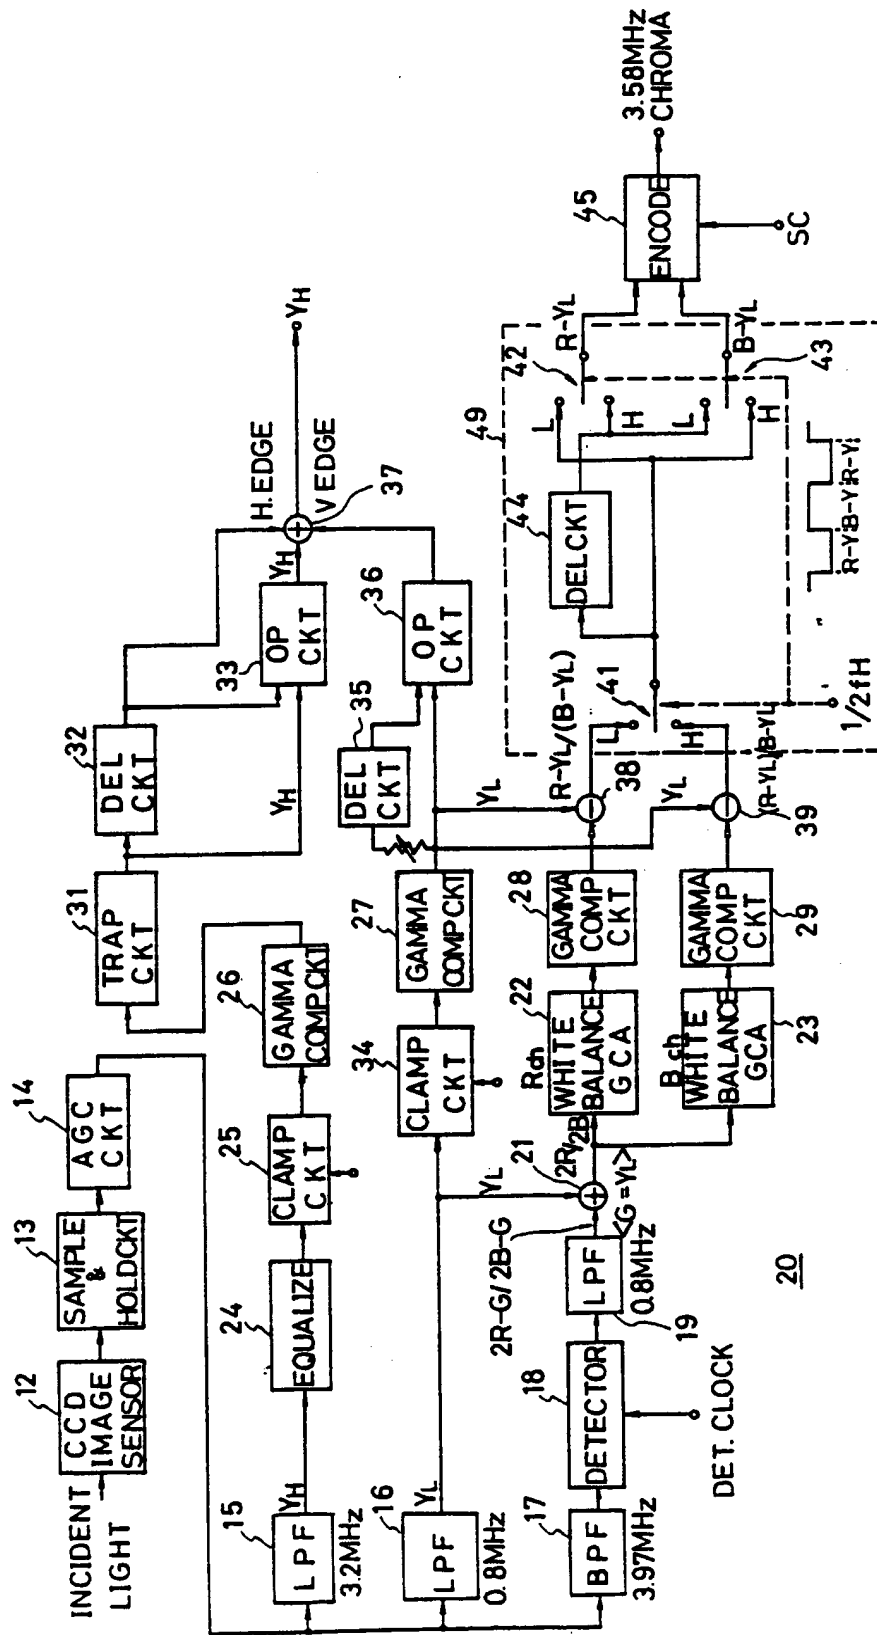


FIG. 8

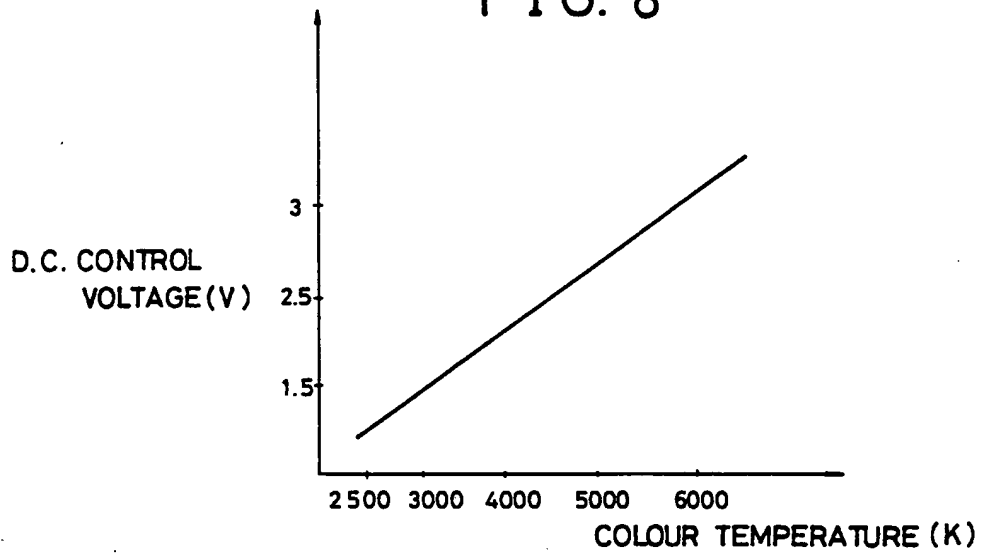


FIG. 9

